


Item	Component	Material
1	Cap	316L
2	Tube	316L

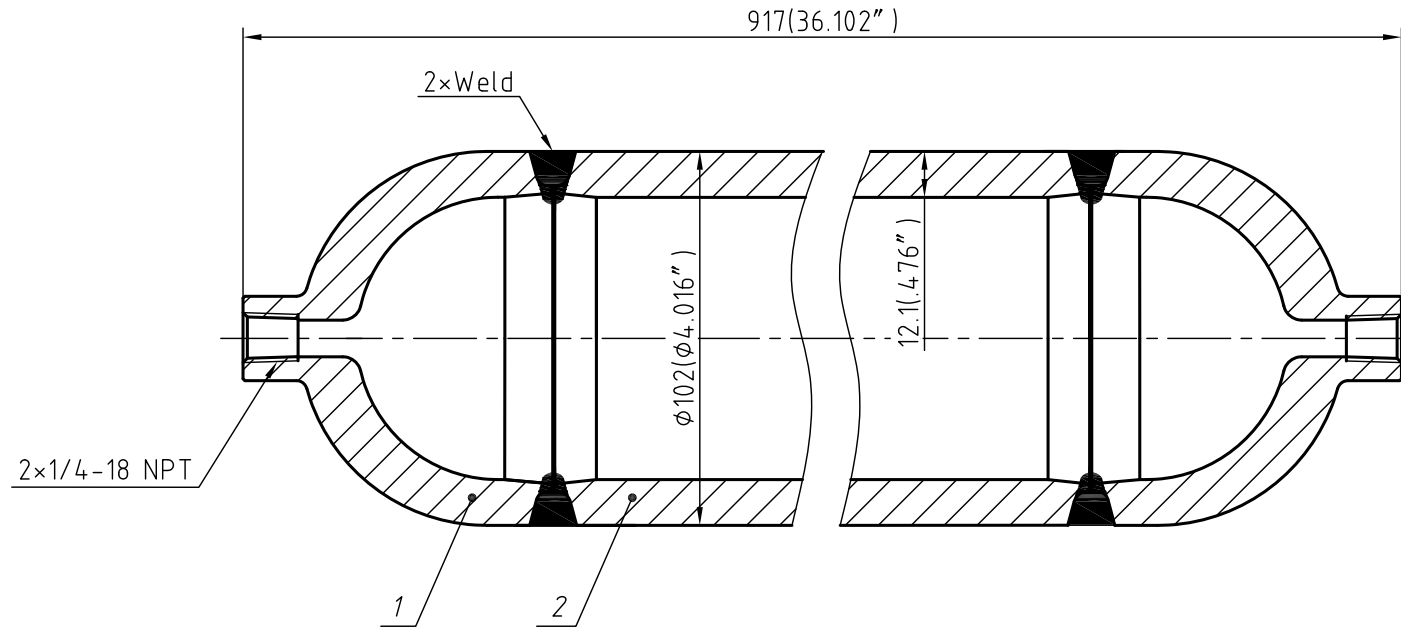


Features	
Maximum working pressure	5000psig(34.4Bar)@-65~100°F(-53~37°C)
Working temperature	-65~850°F(-53~454°C)

**NOTES:**

1. Dimensions for reference only.

2. There must be using high temperature NPT thread sealant if working temperature is higher than 232°C.

REV.	DATE	DRAWN	CHECKED	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETER		 <b>FITOK</b>
		NAME	DATE	6L-SC50-DN4-3785-W		
DRAWN				DO NOT SCALE DRAWING		REV. 2
CHECKED				SHEET 1 OF 1		
APPROVED						