



Item	Component	Material
1	Sample Cylinder	316L

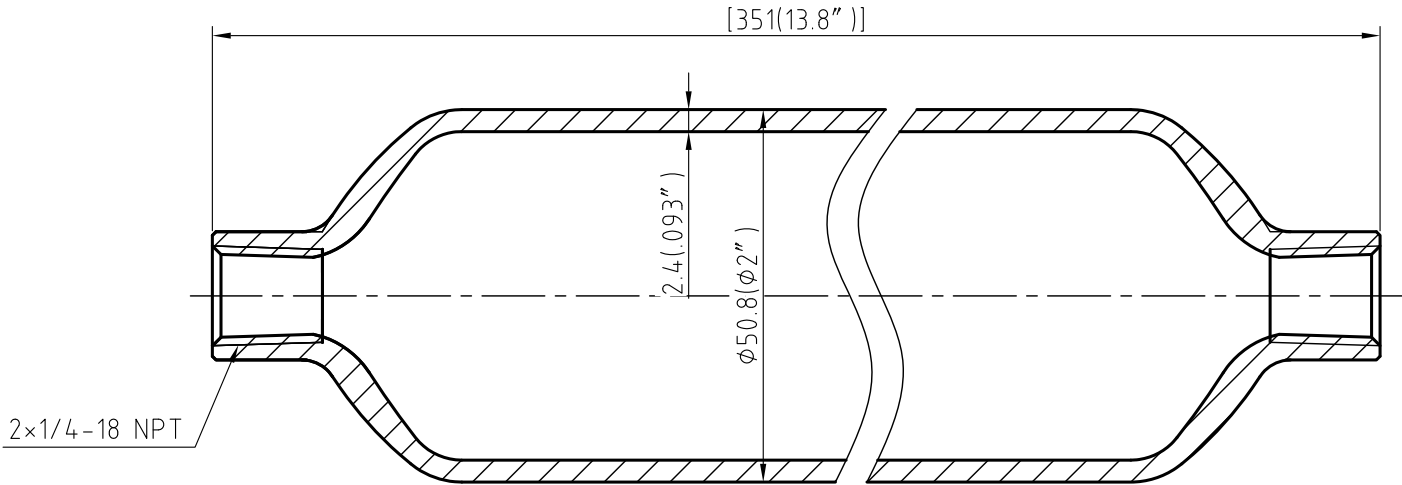

NOTES:

- 1.Dimensions for reference only.
2. There must be using high temperature NPT thread sealant if working temperature is higher than 232°C
- 3.Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirements as stated in ASTM G93 Lever C.

Features	
Maximum working pressure	1800psig(124bar)@-65~100°F(-53~37℃)
Working temperature	-65~800°F(-53~426℃)

					FITOK
REV.	DATE	DRAWN	CHECKED		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETER
	NAME		DATE		Sample Cylinder
DRAWN				6L-SC18-DN4-500-F2	REV.
CHECKED					1
APPROVED				DO NOT SCALE DRAWING	SHEET 1 OF 1