


Item	Component	Material
1	Plug	316
2	Body	316
3	Seal	316L
4	Seat Retainer	316
5	Spring	Aolly X-750
6	Seat Retainer Backup Ring	Reinforced PTFE
7	Seat	PEEK
8	End Connection	316
9	O-ring	FKM
10	Seat Carrier Guide	316
11	Ball	S21800
12	Stem	316
13	Stem Washer	PEEK
14	O-ring	FKM

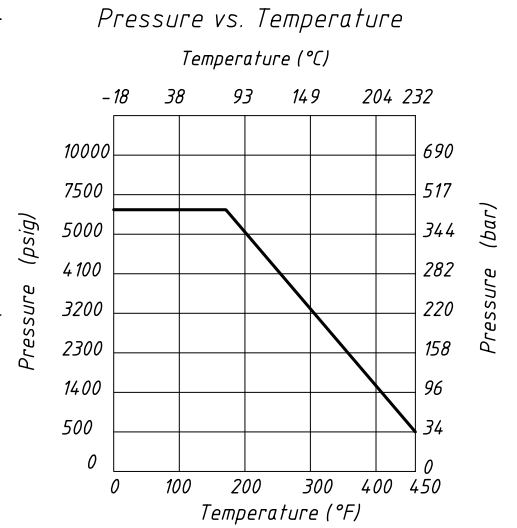

Valve Features	
Maximum working pressure	6800psig(470bar)
Working temperature	0~450°F(-18~232°C)
Orifice	0.19in.(4.8mm)
Cv	1.0

NOTE: Dimensions for reference only.

						FITOK		
				<small>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETER</small>		<i>Ball Valve</i>		
REV.	DATE	DRAWN	CHECKED	BFHSS-ML12-P				REV.
		NAME	DATE					1
DRAWN								
CHECKED				DO NOT SCALE DRAWING				SHEET 1 OF 1
APPROVED				FITOK Group				