



Item	Component	Material
1	Sample Cylinder	316L

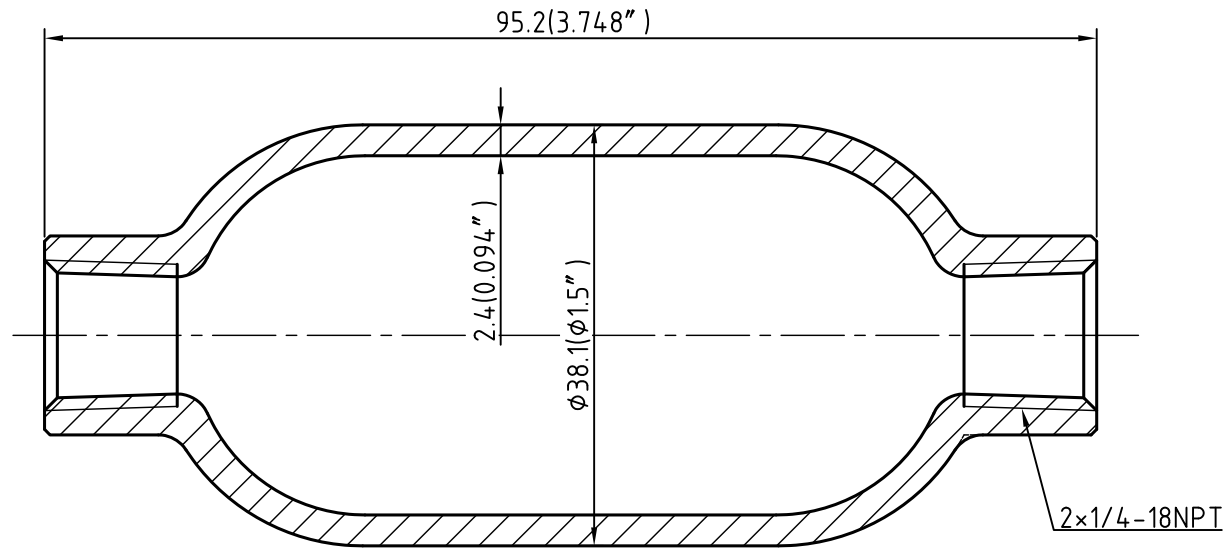

Features	
Maximum working pressure	1800psig(124bar)@-65~100°F(-53~37°C)
Working temperature	-65~800°F(-53~426°C)

NOTES:

1. Dimensions for reference only.
2. There must be using high temperature NPT thread sealant if working temperature is higher than 232°C

REV.	DATE	DRAWN	CHECKED	 UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETER	FITOK Sample Cylinder
		NAME	DATE		
DRAWN				6L-SC18-DN4-50 DO NOT SCALE DRAWING	
CHECKED					
APPROVED				SHEET 1 OF 1	